


# LUMIWISE™

## LED LINEAR LIGHT SPECIFICATION


### LUMILENA GR Linear Light Single /Continuous Line option

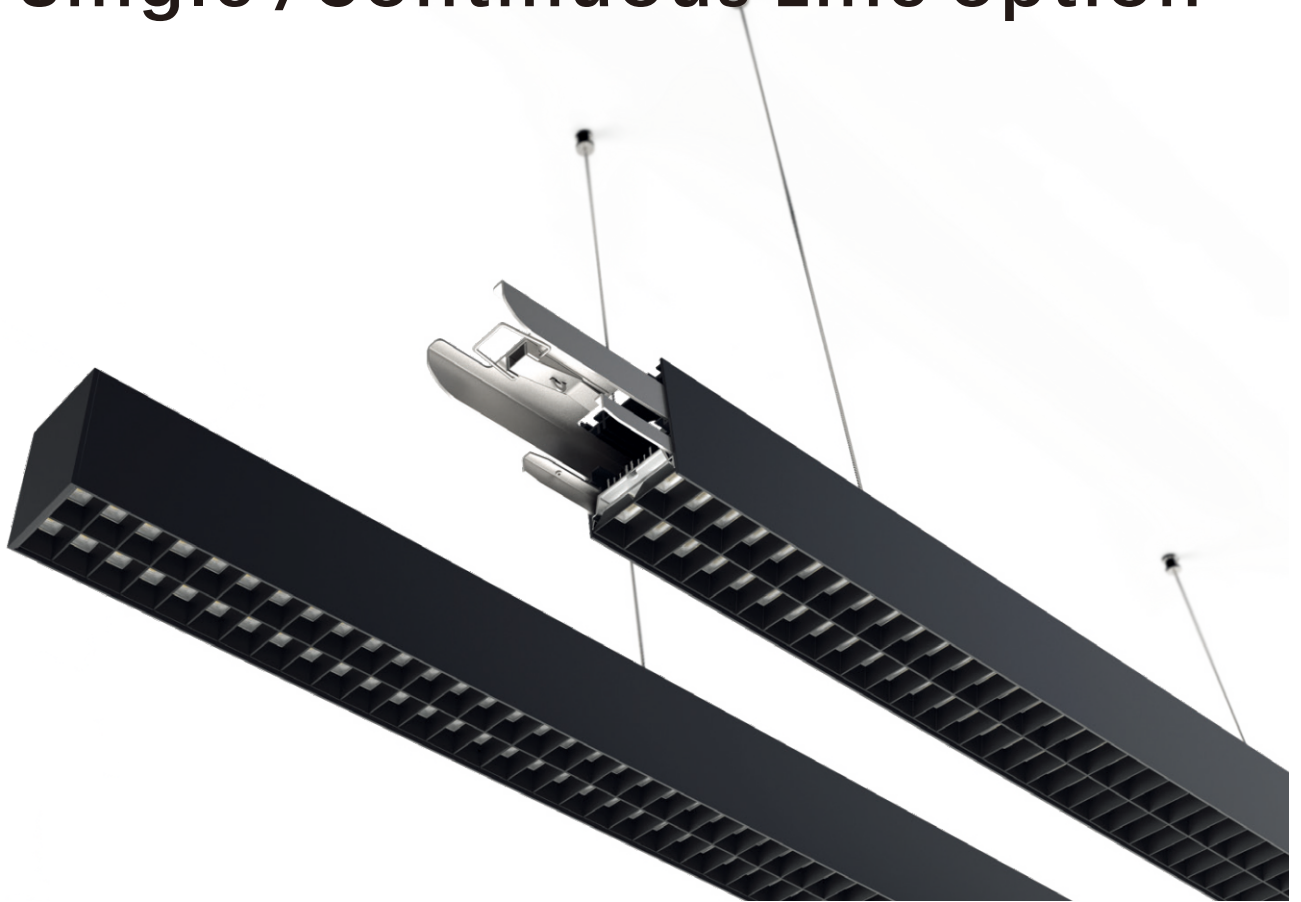

Note: Lumiwise may change product specifications and installation guidance without prior notice.



## LUMILENA GR Series

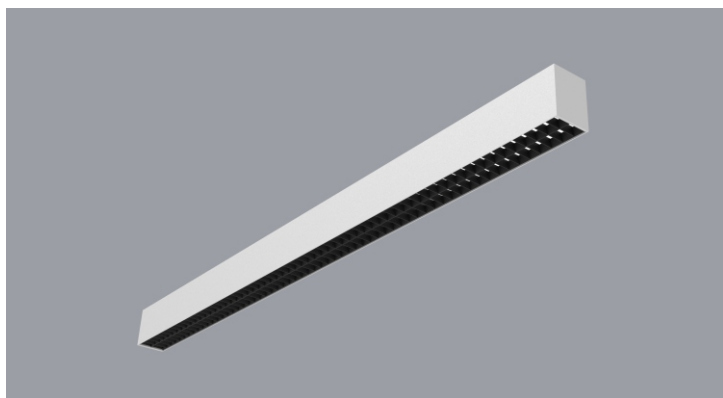


## Features & Benefits

- High efficacy of more than 130LM/W.
- Seamless connection without light leakage.
- Fast installation and easy maintenance.
- EN12464-1 compliant.
- Shining free and uniform light.
- Dot free illumination and screwless endcap.





Discreet and timeless pendant light with direct or direct/indirect light emission. Aluminum profile powder-coated in white and black. Highly efficient lighting system with optimal light control. Available in anti-glare or efficiency-optimized versions. Excellent for office areas (UGR ≤ 16) and computer workstations. Available in individual light colors as well as freely adjustable light colors, making them ideal for modern interior lighting design.

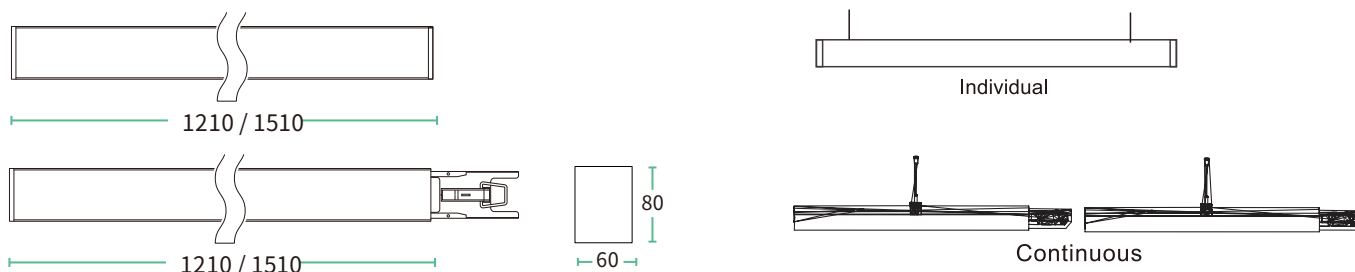
## Dimension




## Luminaire Parameters (Data tested by ies)

Item Code	LN60801200GRX1X2	LN60801500GRX1X2	LN60803000GRX1X2
Size	1210*60*80mm	1510*60*80mm	3032*60*80mm
Efficacy		120lm/W-130lm/W	
UGR		<16(Direct) , <13 (indirect/direct)	
Diffuser material		LENS+REFLECTOR	
Lumens	2654lm (Direct Light)	3630lm (Direct Light)	8000lm (Direct Light)
Typ.power	25W	27W	53W
CCT		3000K/4000K/3000-6500K	
CRI		>80 ( 90 optional)	
Beam angle		70° (direct) & 140° ↑ 70° ↓ (Indirect/direct)	
Input voltage		200-240VAC 50Hz/60Hz	
Linkable		Under request	
Power factor		>0.9	
Power Supply		BOKE /TRIDONIC Driver	
Dimming		On/off or DALI	
Color		  RAL 9016 RAL 9005	
Installation		Ceiling Surface mouted/Pendant	
Warranty		5 years	
Certifications		CE/RoHS	

## Photometrical (ies/LDT files under request)

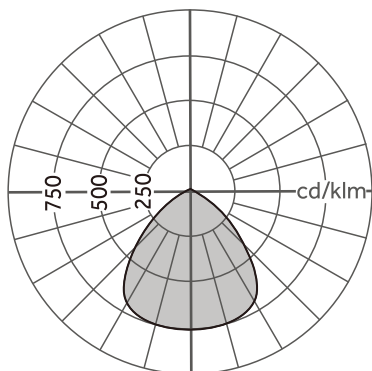

Direct light

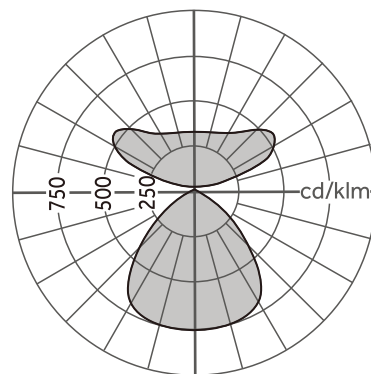


Direct/indirect

## Accessories



Cord Suspension Kit,1.5m



Ceiling Clip



Power Cable with Connector, 3 Wires,1.5m



Power Cable with Connector, 5 Wires,1.5m

## Package

Package	Product Size (mm)	Carton L (cm)	Carton W (cm)	Carton H (cm)	Total Volume (CBM)	G.W (KG)	G.W (KG)	Volume weight
4pcS/carton	1200mm	137	37	15	0.076	13	12	15.207
	1500mm	163	37	15	0.090	17	12	18.093

## Applications:

Office ,school ,airport or other commercial lighting

